
First 44.7

Standard equipment & options



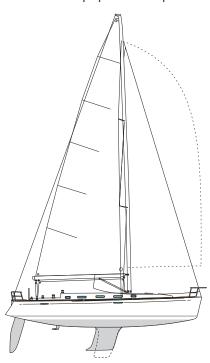

LOA	44'11"
Hull Length	43′9″
LWL	37′8″
Beam	13′0″
Displacement21	
Standard Sail Area	
Draft(standard) 6'10".	(optional) 8'6"
Ballast (standard)	7,518 lbs
Ballast (optional)	8.047 lbs
Fuel Capacity	53 gal
Water	
Auxiliary	54 hp
Hull Design: Farr Yacht Design	

Rig Dimensions: Mast...Classic Racing

I	57′5″	57′5″
I	15′9″	15′9″
P		
E	20′5″	20′5″

CONSTRUCTION

HULL: Solid fiberglass/GRP with structural hull liner, laminated for load bearing and distribution.

DECK: fiberglass/GRP balsa sandwich for rigidity reinforced with unidirectional rovings, weight saving, insulation and soundproofing.

INTERIOR WOOD: Beechwood stained finish.

All bulkheads bonded 360 degrees to hull and deck for structural strength Epoxy/fiber rudder and stock.

ON DECK

SS stemhead fitting with roller Self-bailing anchor locker with windlass support 800w electrical windlass SS bow pulpit w/navigation lights Varnished wood toe rail along the hull-deck junction (8) aluminum mooring cleats SS stanchions w/semirecessed bases Double set of stainless lifelines
(1) Lewmar® Racing mainsheet traveller track w/ball-bearing car adjustable under tension

(2) Lewmar Racing genoa sheet tracks adjustable under tension Mainsail tackle with ball-bearing blocks (2) Harken® 44.2ST maneuvering winches on coachroof (2) Harken 52.2STgenoa sheet winches

Spinlock® XT deck stoppers

Wichard® foldaway paddeyes for spinnaker blocks (2) semi-recessed shroud chainplates Lewmar Y-Spoke black anodized alum. wheel (1.70 m dia.)

Self-aligning upper and lower rudder bearings Teak helmsman seat

Teak-slatted cockpit seats (3) Storage lockers Locker for gas bottles

Liferaft compartment below helm seat Emergency tiller

SS aft pulpit w/aft pulpit opening lifelines and horseshoe buoy holde Stern light on pulpit

Flagpole and holder Teak-slatted bathing platform Removable SS bathing ladder

SPARS / RIGGING

Sparcraft Racing 9/10 fractional keel-stepped tapered mast in anodized aluminum w/two sets of aft-swept spreaders Anodized aluminum boom Spinnaker poletrack on mast Mast step fitting with 11 Lewmar blocks Stainless standing rigging Backstay adjuster

RUNNING RIGGING

(1) Mainsail halyard

(1) Vectran genoa halyard Polyester mainsheet

(2) Genoa sheets

(2) Reefing lines

Boom vang

(1) Outhaul line, vang line

SAILS

Sails not included

SALON

STARBOARD:

Headroom 6'8"
U-shaped settee with cushions and back rests

Lockers above the seat-backs Stowage under the settee

Bar in settee back rest to starboard

(2) Lewmar opening hatches with blinds

(2) Opening ports (2) Fixed hull ports

Grabrails with built-in blinds

Salon table with wood inlay and bar

(4) Overhead halogen lights

Adjustable double hinged settee

PORTSIDE:

(2) fixed ports

(2) hatches with rolling blinds

Opening port with blind on coachroof

Large storage cabinet with 3 doors, drawers and

Additional storage above cabinet

NAV STATION

Headroom 6'7" Large varnished chart table Stowage Bookshelf

(1) Lewmar opening port

Pigeon hole storage compartments

Electrical panel

Radio & CD player

GALLEY

Headroom 6'5"

Double SS rectangular sinks with mixer tap pressurized hot and cold water

Gimbaled 2-burner LPG stove w/oven

Laminated counter top

12 volt electric refrigerator w/basket for storage

Cutlery drawer

Trash can Stowage compartments with doors

(2) Overhead lights

Dust pan in the floor

(1) Lewmar opening port

AFT HEAD

Headroom 6'9"

Fully molded head compartment with USCG approved marine toilet & holding tank

Round FRP washbasin w/mixer tap, pressurized hot

and cold shower

Locker with door

12v sump pump for shower

Towel rails and accessories

Overhead light

Lewmar opening hatches

FORWARD CABIN

Headroom 6'3" Double side berth

Storage under berth

Portside settee

Shelves alongside hull

Hanging locker

Opening Lewmar deck hatch

Halogen reading lights

Ceiling lights

FORWARD HEAD

Fully molded head compartment with USCG approved marine toilet and holding tank

Round SS FRP wash basin w/mixer tap, pressurized hot and cold shower.

Locker with door

12v sump pump for shower Towel rails and accessories

Overhead light

Lewmar opening hatches

AFT CABINS

Headroom: 6'8'

Double berth with foam mattress

Hanging locker

Locker along the hull

Stowage space under berth Storage shelves at head of bed

Overhead light

(1) Lewmar port opening into the cockpit

(1) Lewmar port opening into the cabinside

PLUMBING

Electric bilge pump Hand- operated bilge pump

105 gals fresh water capacity

Pressurized water system with expansion tank 12v sump pump for shower

Flush thru hulls

ELECTRICITY & LIGHTING

12 volt circuit 1 x 110 amp battery - engine

2x140A amp battery - house 16-function electrical panel

Navigation lights

110v shore power

110v battery charger (20 amp)

ENGINE EQUIPMENT

53 gallon fuel tank

Engine compartment soundproofed & insulated to USCG standards

Engine 40 h.p. Volvo 2040 sail drive

STD option D255 volvo 55Hp

Saildrive

Two-blade fixed propeller Hour meter and fuel gauge

MISCELLANEOUS

Maintenance kit

(2) Winch handles

Owner's record and handbook STD mast: 2 spreaders + 1x19 cable rigging

Race 1: 2 spreaders + dyform rigging

Race2: 3 spreaders + rod rigging CLUB RACING PACK (Optional)

CLUB RACING GEAR I

2 Spreader Tapered Mast-Dyform Standing Rigging Hydraulic Backstay Adjuster

Tuff Luff Forestay

CLUB RACING GEAR U.S. 2 Spreader Tapered Mast-Dyform Standing Rigging Hydraulic Backstay Adjuster

ProFurl Genoa Furler with Split Drum



For additional information and photos, visit beneteauusa.com

