

GENERAL SPECIFICATIONS

• Overall Length (L.O.A)	13,94 m	45'9"
• Hull length	13,50 m	44'3"
• L.W.L.	12,98 m	42'7"
• Hull Beam	4,50 m	14'9"
• Deep draft	2,27 m	7'5"
• Deep ballast weight	2 808 kg	6,191 lbs
• Shallow draft	1,75 m	5'9"
• Shallow ballast weight	3 036 kg	6,693 lbs
• Air draft	20,60 m	67'7"
• Air draft (ICW)	19,35 m	63'6"
• Light displacement	10 549 kg	23,257 lbs
• Fuel tank capacity	200 L	53 US Gal
• Fresh water capacity (standard)	370 L	98 US Gal
• Fresh water capacity (Option)	200 L	53 US Gal
• Engine power	57 HP	57 HP
	80 HP	80 HP

ARCHITECTS / DESIGNERS


- Naval Architect: Finot - Conq And associates
- Interior design: Nauta Design

CE CERTIFICATION

- Category A - 10 people
- Category B - 11 people
- Category C - 12 people

STANDARD SAIL LAYOUT AND AREA

• Mainsail	50,00 m ²	538 sq ft
• Genoa (104 %)	50,00 m ²	538 sq ft
• Asymmetrical spinnaker	156,00 m ²	1,679 sq ft
• I	17,43 m	57'2"
• J	5,65 m	18'6"
• P	16,36 m	53'8"
• E	5,43 m	17'10"

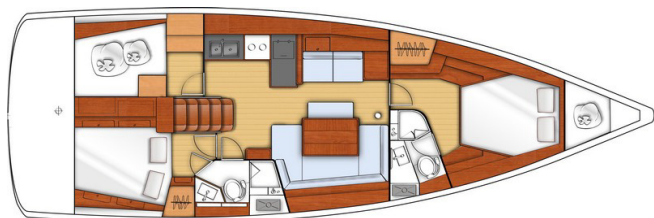

2 cabins - 2 heads



3 cabins - 2 heads

STANDARD EQUIPMENT

CONSTRUCTION

Design made following European Directive requirements and according to CE certification

- Monolithic hull in polyester
- Monolithic structural hull liner bonded to the hull
- Injection molded deck in glass fiber/balsa sandwich, covered with «diamond-point» non-slip coating
- Hull-deck joint screwed, bonded and trimmed with 1 toerail
- Cast iron keel fixed with bolts and stainless steel backing plates
- Rudder hung with glass composite stock
- White hull - Grey metal hull decoration

DECK EQUIPMENT

RIGGING

- Standard mast 9/10 anodized aluminium deck stepped, 2 aft-swept spreaders
- Anodized aluminum boom
- Discontinuous stainless steel standing rigging
- 2 Backstays with turnbuckles
- Rigid boom vang
- Genoa furling system with drum on the deck
- 2 Stand Up blocks on mainsheet arch
- 2 Genoa tracks with piston adjusted traveller cars
- 2 genoa sheet turning blocks
- Rigging run back to cockpit (except boom topping lift)
- Complete running rigging: Main halyard, Genoa halyard with clutch on mast and cleat, Boom topping lift with cleat on mast, Mainsheet, 2 Genoa sheets
- 2 Reefing lines, 1 Manual reef
- 7 Clutches
- 2 Halyard bags

WINCHES

- 2 Self-tailing genoa sheet winches (H50.2 STC)
- 2 Self tailing coachroof winches (H40.2 STC)
- 2 Aluminum winch handles Speed Grip
- 2 Winch handle holders

SAILS

- Furling genoa with UV protective strip
- Semi full batten sail with slider and roller slider (with logo)
- System: Lazy Jack System and Lazy bag in Natural color

MOORING -ANCHORING GEAR

- Self-draining chain locker - Clench bolt - Hatch cover
- Single roller stainless steel bow fitting with offset roller
- 1 12 V - 1000 W vertical electric windlass - Remote control
- 6 Aluminum mooring cleats - Stainless steel chafing plate

SAIL LOCKER

- Access through deck hatch T60
- Stainless steel ladder
- Shelving unit

SAFETY ON DECK

- 1 Open stainless steel forward pulpit - Step
- 2 Stainless steel aft pushpits
- 1 Ring lifebuoy bracket
- 1 Outboard engine bracket
- Welded ring on pushpit for flag
- Double guard lines and stainless steel stanchions - Side boarding gate on either side

COCKPIT

- Self-bailing cockpit
- 2 Cockpit locker
- 2 Lockers in cockpit floor under helm's feet
- 1 Liferaft locker under helm seat, in cockpit bottom (0,80 m x 0,40 m x 0,58 m / 2'7" x 1'4" x 1'11")
- 1 Gas locker for bottle(s) under the port helm seat
- Natural solid wood slatted cockpit benches
- 2 Steering wheel consoles: Stainless steel steering wheels - 900 mm diameter - Leather covered - Steering gear at the helm station - Metal cable transmission system - Stainless steel handrail - Navigation instrument pod (optional instruments) - Cup holder
- 1 Deck filler for access to tiller system + Power supply access hatch
- 1 Emergency tiller
- 2 Steering compass on consoles
- Portside engine control and control panel
- Polyester cockpit table - 2 leaves - Glove boxes - 2 Large storage space - 2 Stainless steel handrails - 12 V Power outlet - Lamp with shade
- 1 Cold water cockpit shower
- 1 Fixed composite arch - Built-in lighting
- 2 Hinged PMMA companionway doors - Sliding hatch made of PMMA

SWIM PLATFORM / STERN DECK

- Fully opening transom, convertible into swim platform (2,85 m x 0,77 m / 9'4" x 2'6")
- Electrically operated
- Natural solid wood decking on swim platform
- 1 Stainless steel swim/boarding ladder - Solid wood steps - Folding

INTERIOR

- Woodwork Alpi Mahogany
- Parquet type laminated floors
- Padding upholstery in salon and cabins (White)
- Fabric upholstery: Commando Natural
- Marine mattresses in the cabins

COMPANIONWAY

Headroom: 2,00 m / 6'7"

- Wooden salon companionway with molded wood hanging steps with non-slip surface
- 2 Stainless steel handrails

SALON

Headroom: 1,97 m / 6'6"

- U-shaped salon bench - Double density foam
- Central seating on pantograph
- Salon table in 1 piece - Varnished wood top with inlay - Aluminum legs
- Mirror on bulkhead
- Cupboard units - Cubby hole lockers and storage along the hull - Storage under bench seats
- Cubbyholes with stainless steel beading
- 2 Panoramic deck house windows with concertina blinds
- 2 Hull portholes with curtain
- 2 Opening portholes on coaming in side windows
- 1 Opening deck hatch with mosquito blind

CHART TABLE - PORTSIDE

- Sliding, can be configured with the armchairs - Placed against the forward bulkhead, against the galley or between the 2 mobile seats
- Table with flap - Molded wood beading
- Switch panel on bulkhead for access to electrical functions
- 1 Reading light

General Equipment list - North America

GALLEY - PORTSIDE

Headroom: 2,00 m / 6'7"

- L-shaped kitchen
- Countertop of synthetic surfaces
- 1 Stainless steel sink 2 rectangular basins - 1 Mixer tap with hot/cold water under pressure
- 1 Gas stove 2 burners - Stainless steel oven on gimbal - Stainless steel protection handrail
- 1 85L / 22 US Gal icebox, top opening
- 1 130 L / 34 US Gal refrigerator (12V), front opening
- Fitted cupboards and closed cubbyholes (Shelving, Garbage bin)
- 1 Lower unit: 1 Drawer - 2 Shelves
- 1 Opening portlight with curtains in the coachroof side window
- Storage space along the hull

STARBOARD AFT CABIN

Headroom: 1,96 m / 6'5"

- 1 Double bed (2,05 m x 1,50 m x 1,15 m / 6'9" x 4'11" x 3'9") - Marine mattress
- Access door to starboard aft head
- Cupboard units - Hanging locker - Closed cubbyholes
- Storage each side of bed
- 1 Hull portholes with curtain
- 1 Cockpit windows with curtains
- 1 Cockpit porthole with curtain
- 1 Deck hatch with mosquito blind

STARBOARD AFT HEAD COMPARTMENT

Headroom: 1,88 m / 6'2"

- Access from the salon or the starboard aft cabin
- Separate shower - 1 mixing tap hot/cold water
- 1 Manual marine toilet
- 1 80 L / 21 US Gal Rigid holding tank
- Washbasin - 1 mixing tap hot/cold water
- Cabinet
- 2 Mirrors
- Toilet accessories
- Cupboard
- 1 Opening portlight with curtains in the coachroof side window

2 cabin layout

AFT-GALLEY (PORT AFT)

Access via galley

- Large storage area (Numerous cupboards, Shelves, Drawers)
- Access door to port cockpit locker
- 1 Deck hatch with mosquito blind

3 cabin layout

PORT AFT CABIN

Headroom: 1,96 m / 6'5"

- 1 Double bed (2,05 m x 1,50 m x 1,15 m / 6'9" x 4'11" x 3'9")
- Cupboard - Hanging locker - Closed cubbyholes
- Storage each side of bed
- 1 Hull porthole with curtain
- 1 Cockpit porthole with curtain
- 1 Deck hatch with mosquito blind
- 1 Cockpit windows with curtains

FORWARD CABIN

Headroom: 1,89 m / 6'2"

- Central double bed (2,05 m x 1,50 m x 1,15 m / 6'9" x 4'11" x 3'9")
- Hanging lockers - Glove box - Cubby hole locker - Lower unit - Stowage under platform
- 3 Flush deck hatches with mosquito blind
- 2 Hull portholes with curtain

STARBOARD FORWARD HEAD COMPARTMENT

Headroom: 1,85 m / 6'1"

- Access through forward cabin
- Manual marine toilet
- 1 64 L / 17 US Gal Rigid holding tank
- Molded basin - Mixer shower (hot/cold water)
- Separate shower - 1 mixing tap hot/cold water
- 1 Mirror
- Cabinet
- Toilet accessories
- Cupboard
- 1 Deck hatch with mosquito blind

ENGINE

- Engine Yanmar Diesel:
 - 57 HP / 57HP Common Rail, Sail Drive (standard)
- Engine control - Control panel in the port cockpit
- Engine compartment: Soundproofing foam - Ventilation: 1 air intake and 1 air outlet
- 1 Alternator 12 V / 125 Amp
- 1 Rotomolded diesel tank 200 L / 53 US Gal (under port aft berth) - Electronic gauge - Low level alarm - 1 Deck filler
- Filters: Sea water - Diesel - Water separator
- Fixed three blade propeller
- 1 Engine access through companionway (opening with 2 gas pistons) - 2 Engine access through aft cabins

ELECTRICITY

- 12 V Circuit
- 2 Service batteries (115 Amp) - 1 Engine battery (110 Amp)
- 1 Load balancer
- 12 V Electrical panel (Fuses - Voltmeter - Water gauge - Fuel gauge - Battery warning - Fuel warning - Water warning)
- 1 12 V Power outlets
- Lighting: Overhead lights - Reading lights - White striplighting
- Navigation lights: 1 Forward and aft navigation lights - 1 Steaming light - 1 Mooring light on masthead
- Wire runs for option cables
- Full 115 V system (Interior power outlet 115 V - 25 Amp battery charger - Shore power socket)

PLUMBING

- 1 Rotomolded freshwater tank 330 L / 87 US Gal (Forward cabin) - 1 Deck filler
- Waterpressure system - Expansion tank - Inline filter
- 40 L / 11 US Gal Electric water heater (engine use)
- 1 Rigid black water holding tank for each WC
- Delayed shower draining and electric shower drain pumps
- 1 Electric bilge pump - 1 Manual bilge pump
- 1 Electric pump for the ice box drain

GAS

- 1 Gas bottle box in the cockpit (diameter 0,34 m x 0,53 m / 1'1" x 1'9")
- Regulator and solenoid

TRIM LEVEL

	ESSENTIAL	EXCLUSIVE
<ul style="list-style-type: none"> B&G Electronic: Helm consoles to port and starboard - 1 Triton 2 display B&G Electronic: Sensor (Log, Speedometer, Temperature) B&G Electronic: Wind Sensor (Windvane, Anemometer) Cockpit shower hot/cold water Hifi: Fusion + Interior speakers & Waterproof exterior speakers LED interior lights 60 Amp battery charger instead of 25 Amp charger 2 Additional 115 ampères service batteries 	<ul style="list-style-type: none"> ■ ■ ■ ■ ■ ■ ■ ■ 	<ul style="list-style-type: none"> ■ ■ ■ ■ ■ ■ ■ ■
<ul style="list-style-type: none"> 1 Port electric primary winch - H46.2 STAECH Galley: 12 V Refrigeration unit in icebox (for storage below 0°C) Salon: Leather covered handrails Storage space(s) under the floor Stainless steel beading for fenders in cockpit locker Salon: Indirect light LED LED: Navigation lights 		<ul style="list-style-type: none"> ■ ■ ■ ■ ■ ■ ■

PACKS

ELECTRONIC B&G PACK

A Pack

- Steering consoles (port and starboard):
 - 2 Zeus 7" wide wireless multifunction touch screens (GPS, Chart plotter, Chart reader - Cartography Navionics Silver included)

B Pack

- Swivel base on reverse side of cockpit table
- Multifunction touchscreen B&G Zeus 12" wide wireless

PERFORMANCE PACK

- Performance Sails
- German system (Two-way mainsheet at the helm station)

OPTION

Navigation electronics: B&G

- 4G Radar
- Chart table: Extra Zeus 7" multifunction screen
- Chart table: Fixed B&G+V50 VHF, AIS receiver function + H50 cockpit handset
- WR10 Wireless autopilot remote control
- AIS 500
- Forward Scan Sensor (Forward underwater vision)
- NAC3 Autopilot
-

Rigging - Sails

- Anodized furling mast system with mainsail
- ICW Roller furling mast
- Asymmetrical spinnaker rigging + Code 0 rigging
- Code 0 with "Top Down" furling system
- Self-tacking staysail with manual furling + Fixed forestay
- Additional bow roller + Stainless steel bobstay
- Releasable forestay chainplate
- Backstays with turnbuckles (Adjustable)*
- Genoa sheet track leads adjustable from the cockpit
- 2 Flag halyards

* *Except on mast with in-mast furling*

Winches

- Electric genoa winches - H46.2 STCEH / 50.2 STC

Hull - Deck

- White or Grey hull
- Solid wood decking on cockpit sole
- Solid wood slatted side decks
- Electric transom remote control
- Bow thruster
- Refrigerated ice-box in cockpit table (30 L / 8 US Gal) - Positive cold
- 3 folding blades propeller
- White or black composite steering wheels + White PVC protective covers
- Stainless steel arch with davits
- Mooring kit
- Mooring cleats on transom
- Windlass control with chain counter in cockpit
- Shore freshwater supply
- Bimini Luxe, Cadet Grey
- Bimini Luxe + Sprayhood, Cadet Grey
- Full cockpit enclosure Luxe, Cadet Grey
- Polyester/wood cockpit table + Covers

Interior equipment

- Interior woodwork: Alpi satin light oak
- Interior upholstery: Commando Monument, PVC Arredo, Leather, Ultra Leather
- Upholstery padding (Salon and Cabins): Taupe, Anthracite
- Luxe folding salon table (double berth compatible)
- TV Pre-wiring + Fusion player (Bluetooth, USB, DVD, MP3), in the salon
- 115 V Microwave oven
- Double berth in salon
- Electric toilet Quiet Flush
- Extra water tank (200 L / 53 US Gal)
- Galley: Sea water/fresh water foot pump
- Mosquito screens
- 12 V / 115 V inverter - 2.000 VA
- 7.5 kVA Generator
- Diesel heater "air pulse"
- 115 V Air conditioning / 50 Hz
- *3-burner stainless steel oven and broiler
- Extra fuel tank (75 L/20 US Gal)
- Top opening cool box in ice box (Freezer)

