



The Beneteau 43

Standard Equipment and Options

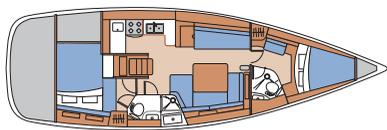

Two cabin

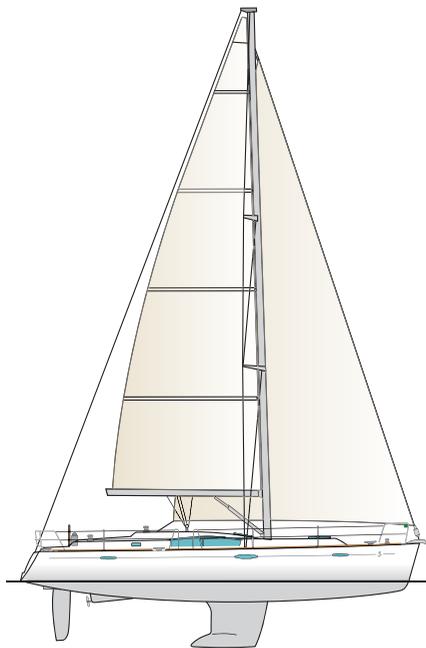

Three cabin

LOA43'
Hull length41'10"
LWL38'1"
Beam13'6"
Displacement19,566 lbs
Sail area891 sq ft
Draft(standard)5'5" ... (optional) 6'7"
Ballast (standard)6,239 lbs
Ballast (optional)5,546 lbs
Fuel capacity53 gal
Water capacity95 gal
Auxiliary54 hp
Hull Design: Berret-Racoupeau	
Interior Design: Nauta Yachts	

Rig Dimensions: Mast	...Classic	...Furler
I51'9"51'9"
J15'4"15'4"
P47'6"47'
E15'9"15'9"

CONSTRUCTION

Hull of hand-laid solid GRP bonded to a structural grid/hull liner of directional fiberglass/GRP for a strong, stiff, light composite. Vinylester hull barrier coat to resist osmotic blistering and zone-specific stitchmat laminates for specific increased strength optimization.

Cored GRP sandwich construction for stiffness, thermal and acoustic insulation and lighter weight. Solid fiberglass reinforcements in high load areas. Integral unidirectional GRP deck beams for added strength. Main bulkheads bonded 360° to the hull and deck for rigid torsional and compressive strength.

STANDING RIGGING

Fractional 9/10 anodized aluminum deck stepped mast standard w/mainsail furling system

Twin aft swept spreaders
Anodized aluminum boom w/outhaul car
Stainless steel shrouds and stays
Genoa roller furling system
Stainless steel chain plates tied to the hull liner molding w/stainless steel tie rods

RUNNING RIGGING

Running rigging is led to the cockpit

Running rigging includes:

(1) Main halyard, (1) Genoa halyard w/jammer & cleat on mast, (1) boom topping lift w/cleat on mast (not led to cockpit), (1) roller furling mainsail outhaul line and (1) inhaul line, (1) mainsheet w/track, (2) mainsheet traveler control lines, (2) genoa sheets and (1) genoa roller furling line
Rigid boom vang w/tackle

SAILS

Furling genoa w/140% overlap, reinforced w/anti-UV protection strip
Furling mainsail w/ vertical battens
Mainsheet led back to port winch
Furling genoa w/drum on deck, furling line led back to the cockpit to port
(2) Genoa tracks & adjustable cars
(2) Genoa sheet foot blocks

DECK GEAR

Chrome finish Lewmar® self tailing winches:
(2) Lewmar® 48 genoa sheet winches on coaming
(2) Winches on coachroof: (1) 40 on port & (1) 40 on starboard
(2) Winch handles & (2) winch handle pockets

MOORING AND ANCHORING

Welded stainless steel bow fitting
(1) Bow roller w/ permanent anchor stowage
(6) Aluminum mooring cleats w/rub strakes
Self-draining anchor rode/chain well w/ lid
1000 W vertical windlass w/ remote control

ON DECK

Stainless steel open bow rail w/nav lights
(2) Stainless steel stern rails
Lifeline gates
Lifebuoy holder, outboard motor bracket, & flag staff
Double vinyl coated lifelines w/ gates
Opening side gates in lifelines
(3) Cockpit stowage lockers
Teak inlaid cockpit seats
(2) Compasses, one at each helm position
GRP cockpit table w/2 drop leaves fitted w/locker & 55 handrail
Aft surface of table support has swiveling pod to take a chart plotter
(2) Waterproof speakers
(2) Winch handle pockets
Reading lamp w/12 Volt socket
(1) Shore supply socket to starboard
Self-draining GRP cockpit floor
2-bottle gas locker (1-bottle standard)
Opening stern gate w/pivoting seat giving access to bathing platform
Teak slatted swim platform
Swim ladder with teak steps to starboard
Hot & cold cockpit shower

STEERING

Spade rudder with s/s stock
Double helm position in cockpit
Twin steering wheels 35-1/2" dia.
Emergency tiller across point & emergency tiller

ACCOMMODATIONS

Light toned ALPI- MOABI woodwork, soles w/parquet look

OWNER'S CABIN FORWARD

Headroom: 6'4"
Double berth: 6'7" x 6'1" w/ high density foam mattress
Ample stowage space, hanging locker
Locker w/clothes locker under hanging section
Large opening hatch with blind/screen
Opening hatch with blind/screen
(2) Fixed hull ports (1 each side of hull) w/curtains
(3) Halogen overhead lights
(1) 110 Volt socket

FORWARD HEAD

One-piece molded head compartment with shower
Manual marine toilet
21 gal rigid holding tank as standard
(1) FRP Washbasin & Hot & cold mixer tap
(2) Storage compartments with mirrors
(1) Glass holder & locker under washbasin w/accessories
(1) Fixed side window w/curtain & (1) opening hatch w/ blind/screen
(2) Overhead lights & switch,

SALON & COMPANIONWAY

Salon companionway w/non-slip surface
(3) Stainless steel handrails
Aft-facing chart table w/lid & wood fiddle
(2) Hinged lockers, closed shelf
Shelf under chart table
Fabric inner lining to hull side
Navigator's seat w/locker
Radio/CD/MP3 player w/two speakers
(1) 110 Volt socket
(2) Closed stowage units and shelves along the hull
Port & starboard shelves w/stainless steel fiddles
U-shaped dining table/settee & 4 cushions
Stowage under settees, Salon table
Stowage along the hull
(2) Hull ports (1 port/1 starboard) with curtains
(1) Panoramic window w/folding blinds
(1) Opening deck hatch w/ blind/screen
(2) Fixed side windows 1 to port with 2 opening ports, 1 to starboard with 1 opening port w/pleated blinds
Chart table lighting: 1 overhead light & 1 strip light for white/red lighting
Salon lighting: 4 halogen overhead lights, Companionway lighting: 1 halogen overhead lights, 1 switch for halogen lights

GALLEY TO PORT

Rectangular stainless steel double sink
Hot & cold pressurized mixer tap
Gimballed 3-burner stainless steel stove w/woven & stainless steel safety bar
4.55 cubic foot front-opening 12 Volt refrigerator
2 cubic foot top-opening GRP freezer w/12 Volt unit
110 Volt microwave oven
(1) Locker w/double door under sink & waste bin
(2) Closed shelves for stowage, cutlery drawer
(1) Shelf w/stainless steel fiddle
(1) Opening port in coaming
Galley lighting: (2) halogen overhead lights, (1) light over stove, (1) 110 Volt socket
(1) Deck hatch w/ blind/screen

STARBOARD AFT HEAD

One-piece molded head compartment w/separate shower w/double folding door
Manual marine toilet
21 gal rigid holding tank
(1) FRP Washbasin & wood handrail. Hot & cold mixer tap
(2) Large closed lockers, glass holder & locker under washbasin w/accessories
(1) Fixed side window w/curtain & (1) opening port
(2) Overhead lights & switch, (1) light over the sink

AFT CABIN

Headroom: 6'9"
Double berth 6'10" x 4'11"
(2) Closed shelves along the hull
Hanging locker w/ sides shelves
(1) Under-berth battery storage
Fabric inner liner on hull
Access door to head
Openings & light in cabin: (1) fixed hull port /curtain, (1) Opening port in coaming, (1) opening deck hatch w/ blind/screen
(1) Cockpit opening port 3 halogen overhead lights w/switch,
(1) 110 Volt socket

PLUMBING

Fresh water: 95 gal standard
Electric pressure water pump w/filter
(2) Rotomolded water tanks fixed to the hull liner (53 gal under port aft cabin berth & 42 gal under fore cabin berth)
(2) Stainless steel deck fillers for water
Cockpit shower w/hot and cold water
Electric shower drain pumps
(3) Bilge pumps (one manual and 2 electric)
6 gal electric water heater

ELECTRICAL

Backlit electrical panel: (10) 12 Volt switches & (11) fused switches & (3) 110 Volt breakers
12 Volt cigarette lighter socket
110 Volt double pole circuit breakers
110 Volt -12 Volt voltmeter
Water gauge & fuel gauge w/central LCD screen
Low battery and low diesel tank alarms
(1) 200 Amp service battery voucher
(1) 95 Amp engine start battery voucher
Battery charging: 110 Volt shore supply & 50' shore power cable
40 Amp battery charger
80 Amp alternator on the engine
12 Volt battery isolator
Lightning grounding for the rigging
(6) 110 Volt sockets
(6) Reading lights, (14) halogen overhead lights.
Bow & stern nav lights, steaming light, fore deck light
Anchor light/masthead navigation light
Wire conduits for options

ENGINE EQUIPMENT

Yanmar 4JH4AE - 54 hp
Engine bed integrated in hull liner, soundproofed with insulating foam
Access under companionway steps through an opening supported by gas struts
Stainless steel propeller shaft w/GRP protection
Fixed three-blade propeller
Rotomolded 52 gal fuel tank w/electronic gauge
Seawater filter & diesel fuel filter/water separator
Engine panel w/integral key start in cockpit

OPTIONS

Contact your dealer for all available options